

# Lepton Identification using the Belle II Silicon-strip Vertex Detector

R. Tiwary

(On behalf of the Belle II Collaboration)

Tata Institute of Fundamental Research, Mumbai 400 005

Email: [rahul.tiwary@tifr.res.in](mailto:rahul.tiwary@tifr.res.in)

**Abstract.** We improve the identification performance of low-momentum leptons, especially electrons, using the specific ionisation information from the silicon-strip vertex detector (SVD) of the Belle II experiment.

**Keywords:** Belle II, SVD, PID, Lepton identification


## 1 Introduction

Particle identification (PID) serves a crucial role in any flavor physics experiment. At Belle II [1], we use information from various subdetectors to identify a track as a lepton [2]. The PID algorithm heavily relies on the information provided by the electromagnetic calorimeter (ECL) to identify electrons and the  $K_L^0$  and muon detector (KLM) to identify muons. The performance deteriorates for low-momentum leptons that fail to reach the respective subdetectors and are instead reconstructed in the tracking system comprising the SVD and central drift chamber (CDC). We aim to improve the identification performance for such leptons using the specific ionisation information from the SVD and CDC (at very low momentum only the SVD counts). Our study will aid physics studies involving low-momentum leptons such as semileptonic decays of  $B$  mesons:  $B \rightarrow K^{(*)}\ell\ell$ ,  $B \rightarrow K^{(*)}\tau\tau$ ,  $B \rightarrow X_c\tau\nu$ , and lepton-flavor-violating tau decays:  $\tau \rightarrow e\ell\ell$  and  $\tau \rightarrow \mu\ell\ell$ , where  $\ell$  is  $e$  or  $\mu$ . Figure 1 shows the transverse momentum ( $p_t$ ) distribution of electrons from two such decays, where a good number of electrons are found to have a momentum below the threshold to reach the ECL.

## 2 Electron Identification using SVD

### 2.1 Event Selection

The study is performed using Monte Carlo (MC) simulated data for  $e^+e^-$  collisions recorded near the  $\Upsilon(4S)$  resonance with the Belle II detector. We use electrons originating from photon conversions ( $\gamma \rightarrow e^+e^-$ ) that occur within the material of the two inner tracking systems, including the SVD. Electrons are reconstructed as primary particles using track-level information from the detector. A converted photon candidate is reconstructed by combining two oppositely

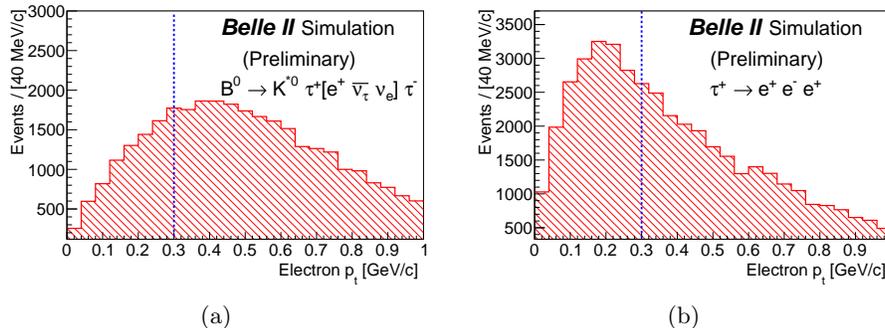

**Fig. 1.**  $p_t$  distributions of low-momentum electrons coming from (a)  $B \rightarrow K^{(*)}\tau\tau$  and (b)  $\tau \rightarrow eee$  decays. The dashed vertical lines indicate the momentum threshold required to reach the ECL.

charged tracks. We apply various kinematic and vertex requirements to suppress background events. We use the  $s\mathcal{P}$ lot [3] technique to subtract the residual background. The  $s\mathcal{P}$ lot extracted two-dimensional distribution of specific ionisation ( $dE/dx$ ) vs. momentum is used as the information from the SVD to the total PID for electron tracks.

## 2.2 PID Performance

The total PID is constructed by combining the information from all subdetector components under different particle hypotheses. The total PID likelihood can be written as:

$$\mathcal{L} = \prod_{\text{det}} \mathcal{L}_{\text{det}},$$

where the product is over the individual likelihoods of each subdetector. The SVD contribution to the total likelihood is obtained as in Ref. [4], with the likelihood for a particle mass hypothesis  $m$  defined as:


$$\mathcal{L}_m(dE/dx, p) = \prod_i \mathcal{P}_m[(dE/dx)_i, p],$$

where  $m = e, \pi, K$  and  $i$  runs over all  $dE/dx$  values assigned to a track.

We compare the performance of the total PID evaluated with and without the SVD information. To calculate the electron identification efficiency, we use the  $\gamma \rightarrow e^+e^-$  sample, while for calculating the rate of a pion (kaon) to be misidentified as an electron we use the  $D^{*+} \rightarrow D^0[\rightarrow K^-\pi^+]\pi^+$  sample. The latter is also used for hadron identification studies [5]. The pion (kaon) to electron misidentification rate is also called the  $\pi \rightarrow e$  ( $K \rightarrow e$ ) fake rate. We define:

$$i \text{ efficiency} = \frac{\text{No. of tracks identified with PID under the hypothesis } i}{\text{No. of tracks kinematically identified under the hypothesis } i},$$

$$j \rightarrow i \text{ fake rate} = \frac{\text{No. of tracks identified with PID under the hypothesis } i}{\text{No. of tracks kinematically identified under the hypothesis } j}.$$

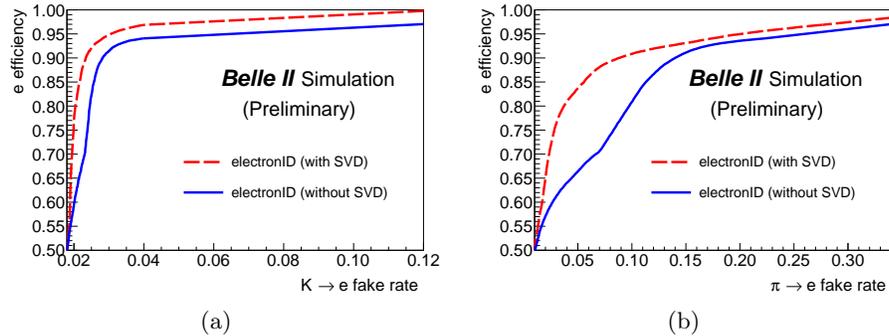

**Fig. 2.** Electron efficiency vs. (a)  $K \rightarrow e$  and (b)  $\pi \rightarrow e$  fake rate plots for different criteria on the total PID variable.


Figure 2 shows that the performance improves significantly with the introduction of SVD information in the PID. For a fixed 10%  $\pi \rightarrow e$  fake rate in MC simulation, the electron efficiency increases from around 80% to 90%. Similarly, for a fixed 4%  $K \rightarrow e$  fake rate in MC simulation, the electron efficiency increases from around 94% to 97%.

### 3 Muon Identification using SVD

The performance of the SVD to separate  $dE/dx$  distributions of muons and pions is studied using simulated charged tracks. We generate  $2 \times 10^6$  muon and pion tracks and let them pass through the detector simulation. Figure 3(a) shows the distribution of  $dE/dx$  vs. momentum for these tracks. We obtain the  $dE/dx$  distribution for muons and pions in momentum bins of 50 MeV/c. The distributions are fitted with a Gaussian function to obtain their mean ( $m$ ) and width ( $w$ ) values. We then look at the distribution of  $\mu$ - $\pi$  separation vs. momentum as shown in Fig. 3(b). The  $\mu$ - $\pi$  separation is defined as

$$\frac{|m_\mu - m_\pi|}{\sqrt{w_\mu^2 + w_\pi^2}}.$$

We observe that muon and pion tracks are not so well separated in the SVD owing to their small mass difference (around  $30 \text{ MeV}/c^2$ ). There is a maximum separation of around 0.6 standard deviations between the two hypotheses. This means we can use the same  $dE/dx$  vs. momentum distribution as the SVD information to the total PID likelihood for both muons and pions. The  $dE/dx$  vs.

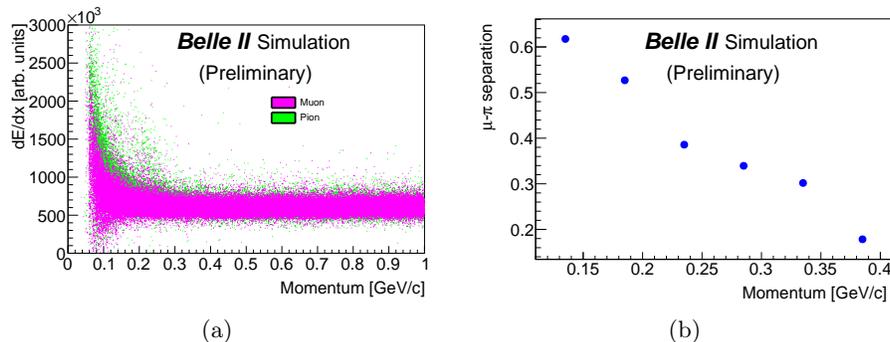

**Fig. 3.**  $dE/dx$  vs. momentum distributions for muons and pions (a), and the  $\mu$ - $\pi$  separation vs. momentum (b).

momentum distribution for pions is obtained using low-momentum pions coming from the  $D^{*+} \rightarrow D^0[\rightarrow K^-\pi^+]\pi^+$  channel, which is an experimentally clean sample with high statistics. Hence, we have decided to use the  $dE/dx$  vs. momentum distribution of pions as the common SVD input to the total PID likelihood for muon and pion tracks.

## 4 Summary

We have presented a study on how to improve the PID performance for leptons using information from the SVD of the Belle II experiment. Inclusion of SVD information to the total PID results in a significant improvement of the electron identification performance. The study based on simulated muon and pion tracks shows that low-momentum muons and pions cannot be well separated with the SVD due to their small mass difference. We have therefore decided to use the  $dE/dx$  vs. momentum distribution of pions as the common input from SVD to the total PID likelihood.

## References

1. T. Abe et al., arXiv:1011.0352 (2010).
2. E. Kou et al., PTEP **2019**, 123C01 (2019).
3. M. Pivk and F.R. Le Diberder, Nucl. Instrum. Meth. A **555**, 356 (2005).
4. C. Pulvermarcher, Diploma thesis, KIT, Germany (2012), <https://publish.etp.kit.edu/record/20770>.
5. S. Hazra, A. B. Kaliyar, and G. B. Mohanty, Belle II Note# TE-2020-019 (2020), <https://docs.belle2.org/record/1974/files/BELLE2-NOTE-TE-2020-019.pdf>.